


GAVITA PRO 1000E DE - HID




Watts: 1,150W
Spectrum: High Pressure Sodium
PPF: 2,100 $\mu\text{mol/s}$
PPE: Unspecified
IP Rating: Unspecified
Operating Temp: 32° - 95°F
Voltage: AC120V / AC208V / AC240V
UVA Capability: Some UV is emitted
Surge-Protection: Unspecified
Controller Option: Yes
Warranty: 3 years / (1 year lamp lifespan)
Material: Unspecified
Ports: AC Input, RJ-14 (6P4C)

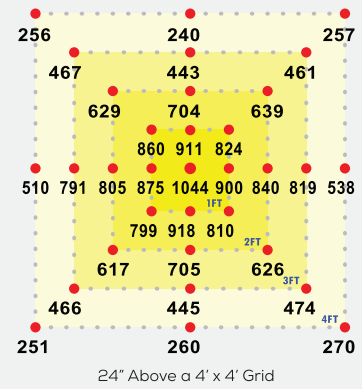

660W SARIN GLO2 - LED




Watts: 660W
Spectrum: Broad-Spectrum (450nm / 660nm peaks)
PPF: 1,820 $\mu\text{mol/s}$
PPE: 2.6 $\mu\text{mol/J}$
IP Rating: IP65
Operating Temp: -40° - 133°F
Voltage: AC120-277V / AC277-480V
UVA Capability: 100W LED Module x2 (400nm)
Surge-Protection: Yes
Controller Option: All 0-10V / PWM Systems
Warranty: 5 years / >50,000 hours
Material: Aircraft Aluminum
Ports: RJ-45 x2, DC Output Connector x2, AC Parallel Connector

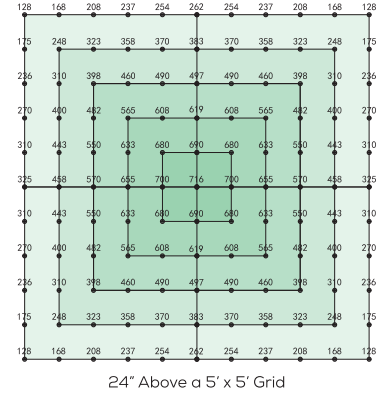

GAVITA PRO 1700E - LED




Watts: 645W
Spectrum: Full-Spectrum
PPF: 1,700 $\mu\text{mol/s}$
PPE: 2.6 $\mu\text{mol/J}$
IP Rating: IP66
Operating Temp: 32° - 104°F
Voltage: AC120-277V
UVA Capability: Yes
Surge-Protection: Unspecified
Controller Option: Yes
Warranty: 5 years / 20,000-30,000 hours
Material: Unspecified
Ports: Wieland RST 16i5 AC Input

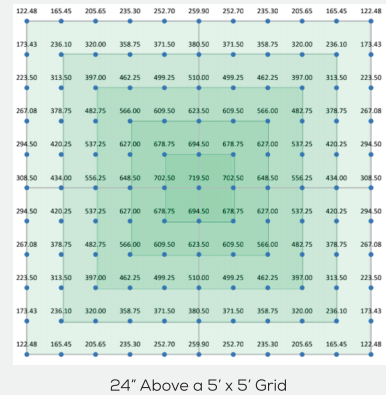

GROWER'S ROI-E680 - LED



Watts: 680W
Spectrum: GC-3K Full Phase
PPF: 1,700 $\mu\text{mol/s}$
PPE: 2.5 $\mu\text{mol/J}$
IP Rating: IP65
Operating Temp: -4° - 176°F
Voltage: AC120V / AC208V / AC240V / AC277V
UVA Capability: No
Surge-Protection: Unspecified
Controller Option: Yes
Warranty: 3 years / 54,000 hours
Material: Unspecified
Ports: AC Input, RJ-45

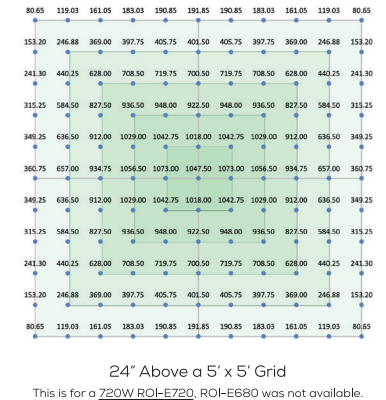

SPYDR 2P 47" - LED



Watts: 632W
Spectrum: PhysioSpec™ Indoor
PPF: 1,580 $\mu\text{mol/s}$
PPE: 2.5 $\mu\text{mol/J}$
IP Rating: IP66
Operating Temp: -23° - 95°F
Voltage: AC100-277V / AC347V / AC400V / AC480V
UVA Capability: Yes
Surge-Protection: Unspecified
Controller Option: Unspecified
Warranty: 3 years standard / 54,000 hours
Material: Anodized aluminum
Ports: AC Input, Unspecified

